


Heat-shrinkable splice closure for telecommunications cables in unpressurized networks. The splice is protected by a laminated liner.

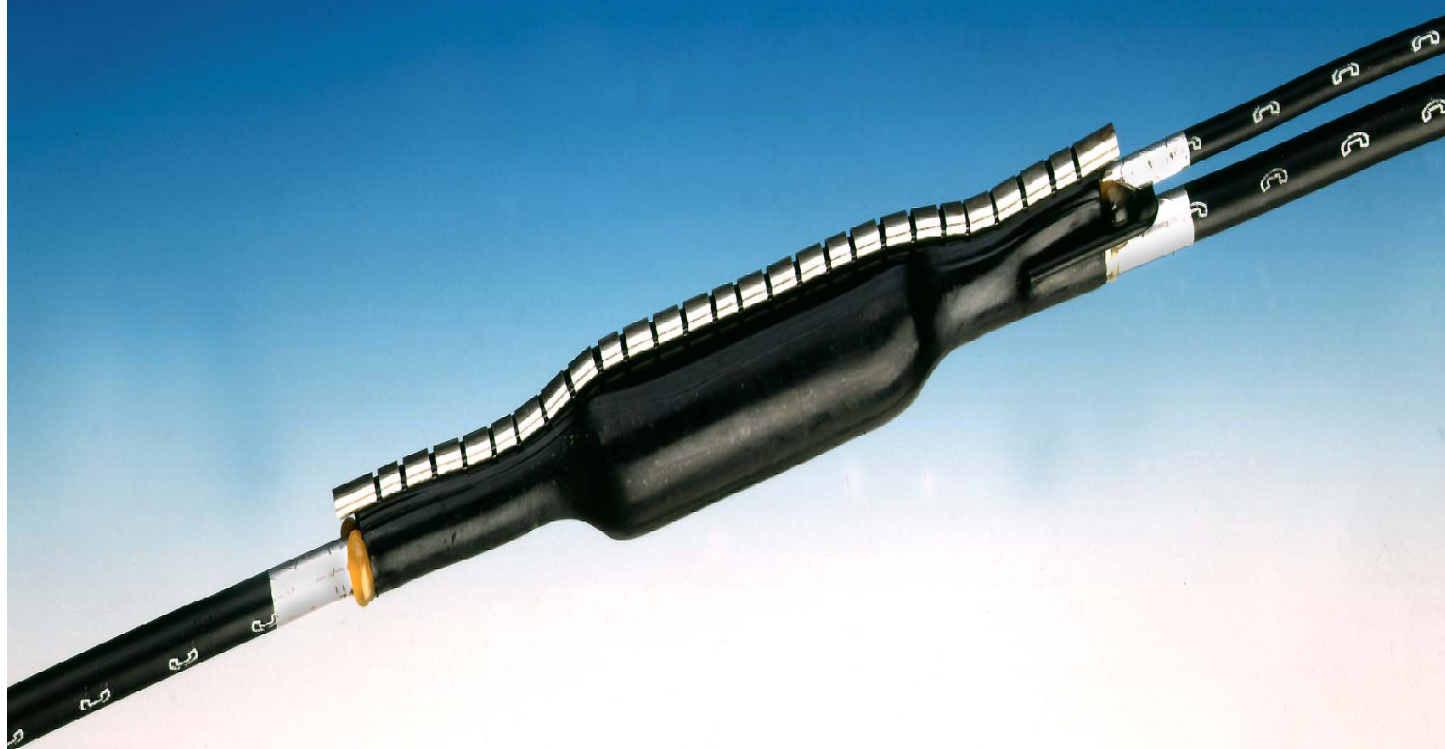


Characteristics of the RSMS

- High mechanical strength due to the laminated liner
- Reliable sealing of the splice area against humidity by means of hot melt adhesive
- Max. 3 cable inlets and outlets on each side
- Simple and reliable installation without requirement of special tools

Technical information


Ordering information

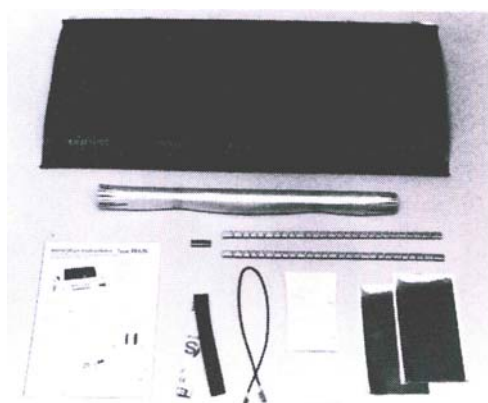

Kit contents
 Heat-shrinkable sleeve
 Laminated liner
 Flexible channel
 Retention clip
 Shield continuity wire
 Drying agent
 Aluminium tape
 Cleaning cloth
 Abrasive strip
 Installation instruction

Branch-off kit BRK

Branch-off clip
 Shield continuity wire for branch-offs
 Shield continuity clip
 Aluminium tape

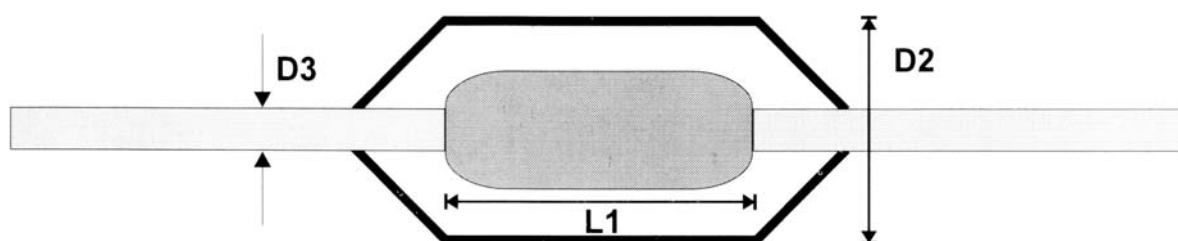

Size/Type	Sheath opening max.	Outer diameter over the liner max.	Cable diameter min.	Length of the sleeve	Article No. RSMS	Branch-off kit BRK	Article No. BRK
RSMS	L1	D2	D3				
43/ 8-130	130	43	8	350	2015101	BRK1	5215927
43/ 8-180	180	43	8	420	2015102	BRK1	5215927
43/ 8-240	240	43	8	450	2015103	BRK1	5215927
43/ 8-340	340	43	8	570	2015104	BRK1	5215927
72/15-160	160	72	15	420	2015111	BRK1	5215927
72/15-210	210	72	15	450	2015112	BRK1	5215927
72/15-340	340	72	15	570	2015113	BRK1	5215927
72/15-460	460	72	15	690	2015114	BRK1	5215927
93/25-190	190	93	25	450	2015121	BRK1	5215927
93/25-240	240	93	25	510	2015122	BRK1	5215927
93/25-420	420	93	25	690	2015123	BRK1	5215927
122/28-190	190	122	28	500	2015131	BRK1	5215927
122/28-280	280	122	28	630	2015132	BRK1	5215927
122/28-420	420	122	28	810	2015133	BRK2	5215928
140/34-250	250	144	34	630	2015141	BRK2	5215928
140/34-330	330	144	34	810	2015142	BRK2	5215928

All dimensions in mm

For branch joints please order one branch-off kit per branch separately!

All the information given herein is correct and reliable to the best of our knowledge. It does not however constitute a guarantee of any particular property. The user is responsible for evaluating the suitability and performance of the products for the particular application. Our liability with respect to the products is exclusively as set forth in our standard terms and conditions of sale, and in no event shall we be liable for any incidental, indirect or consequential damage of any kind. We reserve the right to alter the formulation of our products for technical reasons without notice.